
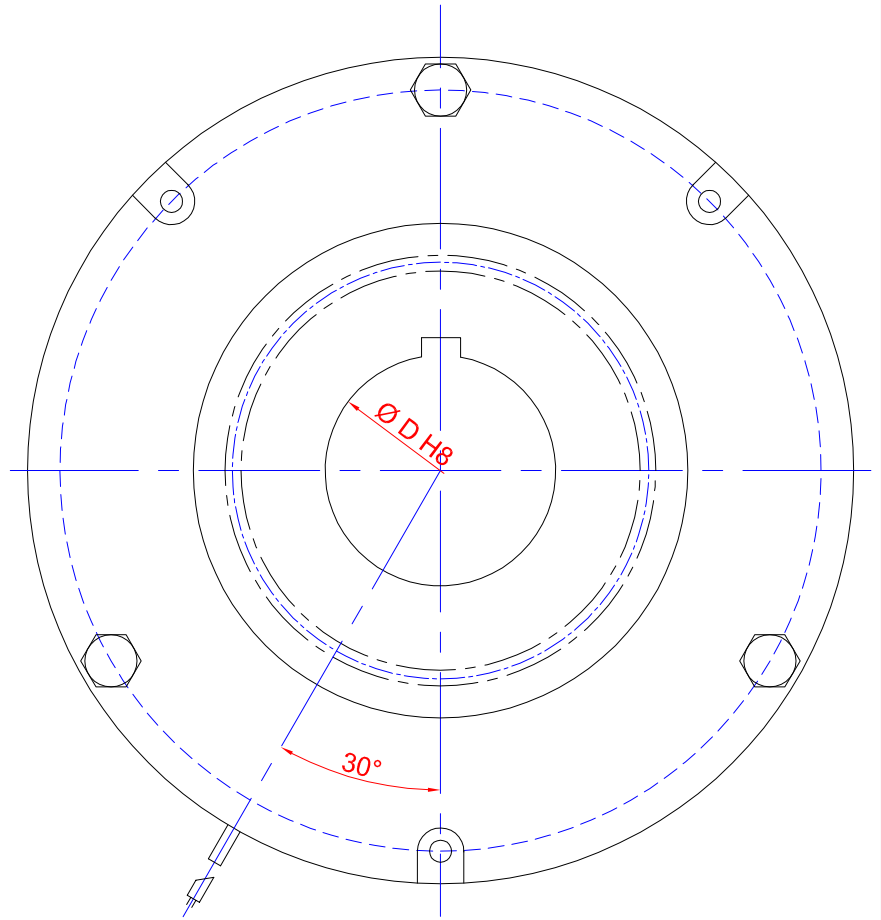


Remove all burs & Sharp Edges

Electromagnetic Single Disc Safety Brake.
Spring Operated to Brake,Electrically Released.
For dry running
24 V DC.

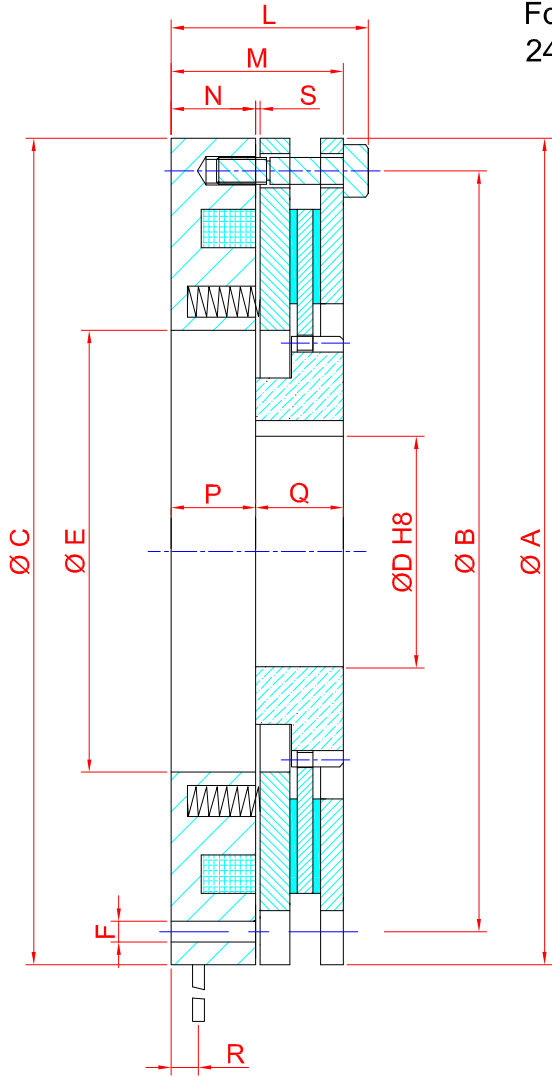

Size	`007	`015	`025	`040
Torque	7	15	25	40
Power @ 20°C (Watt)	15	22	30	44
d H8 (max)	14	19	19	24
A	98	120	134	158
B	86	110	120	142
C h9	98	120	134	158
E	25	40	48	48
F	4.5	5.5	6.5	6.5
G	10	12	14	14
L	59	67	76	83
M	54	61	69	76
N	35	40	45	52
p	36	42	47	55
Q	18.5	19.5	23	23
R	7.5	8	11	13
S	0.1~0.3	0.2~0.4	0.2~0.4	0.2~0.4
Weight in Kgs	1.6	2.5	4.8	7

Dimensions in mm, Tolerances unless otherwise stated-NOM

Title :-				CHKD	<i>Srinivas</i>			
Single Disc Safety Brake		00	Initial Drawing	31/12/2015	Vinod	DRN		<i>chandraiiah</i>
REV	DETAIL	DATE	APVD	DATE	01.08.2016	DATE		01.08.2016
NARSIPUR & SONS Bangalore- 74		Location :-			SCALE	DRG. NO.	A4	
		Electro Magnetic Brakes			NTS	NS/ESB-XXX.10		